



No.	Name	Material
1	Bolt	A193 B8
2	Nut	A194 8
3	Washer	SS304
4	Body	A351 CF8M
5	Bonnet	A351 CF8M
6	Seat ring	PTFE
7	Ball	SS316
8	Stem	A182 F316
9	Thrust washer	PTFE
10	Stem packing	PTFE
11	Gland	SS316
12	Handle	SS201+PVC
13	Wrench washer	SS304
14	Handle nut	A2-70

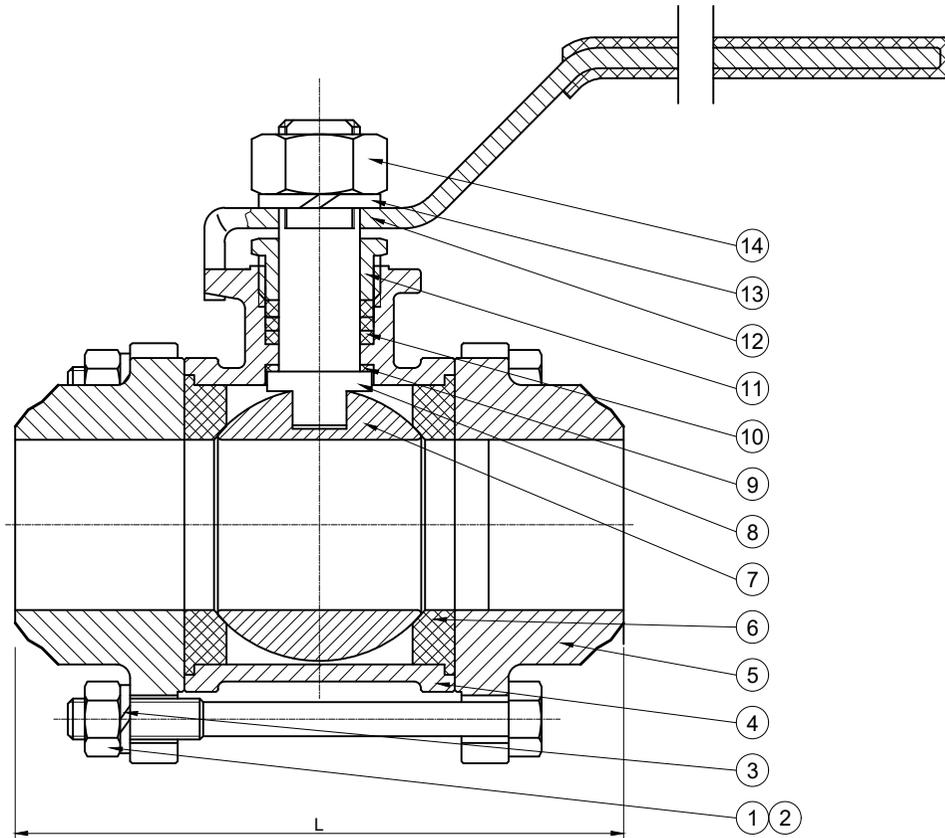

Performance Specification			
Pressure		1000WOG	
Test Pressure	Strength Test	10.3	Mpa
	Seal Test	7.5	
	Air Seal Test	0.6	
Working Temperature		-29~+120°C	
Medium Application		W.O.G	

- Technical Requirements**
- Design & Manufacture conform to ASME B16.34;
 - Temp. & Pressure conform to ASME B16.34;
 - Face to Face Dimension conform to MFG'S;
 - Weld Ends Dimension conform to ASME B16.25;
 - Inspection & Testing conform to API 598;

NOTE: The manufacturer keep the right to upgrade the design for purpose of design optimization but do not change installation dimension and key materials.

CUSTOMER :	
PO NO:	
DRAWN	YE
CHECKED	
APPROVED	
DATE	25/06/28
▲ INDICATES CRUCIAL FEATURE	
UNLESS OTHERWISE SPECIFIED	
1. ALL DIMENSIONS ARE IN MM	
2. ALL PROJECTIONS ARE IN THIRD ANGLE	
3. ALL SHARP EDGES ARE TO BE REMOVED	
STAMP:	
REV.	DATE ALT. NO. SIG. SCALE NTS

J-VALVES FLUID EQUIPMENT CO., LTD

J-VALVES

Building 2, No. 12 Xingchao Road, Binhai Park, Longwan District, Wenzhou City, Zhejiang, P.R.China 325024
Phone: +86 0577-56692520

TITLE :- BALL VALVE GENERAL ASSEMBLY			
SIZE	TYPE:		
CLASS	1000WOG	Float, Full bore, BW	
VPO CODE :	DRAWING NUMBER :-	REV.	SHEET NO:
--	JF-DR-	0	1 OF 1

*** THIS DRAWING AND DESIGN IS THE PROPERTY OF J-VALVES. IT IS A CONFIDENTIAL DISCLOSURE WHICH MUST NEITHER BE COPIED NOR USED IN ANY MANNER DETRIMENTAL TO THEIR INTERESTS.

CHECKED BY	
PRINTED BY	
OLD DRAWING NO.	
BASED DRAWING NO.	
DATE	SIGNATURE